


Set the Input Parameters

RiskVision populates the available arguments based on the **Check Template** parameters that you selected. Each argument may have different input parameters.

To specify the value:

1. Select an argument.
2. Click **Edit**. The **Parameter Editor** dialog appears.

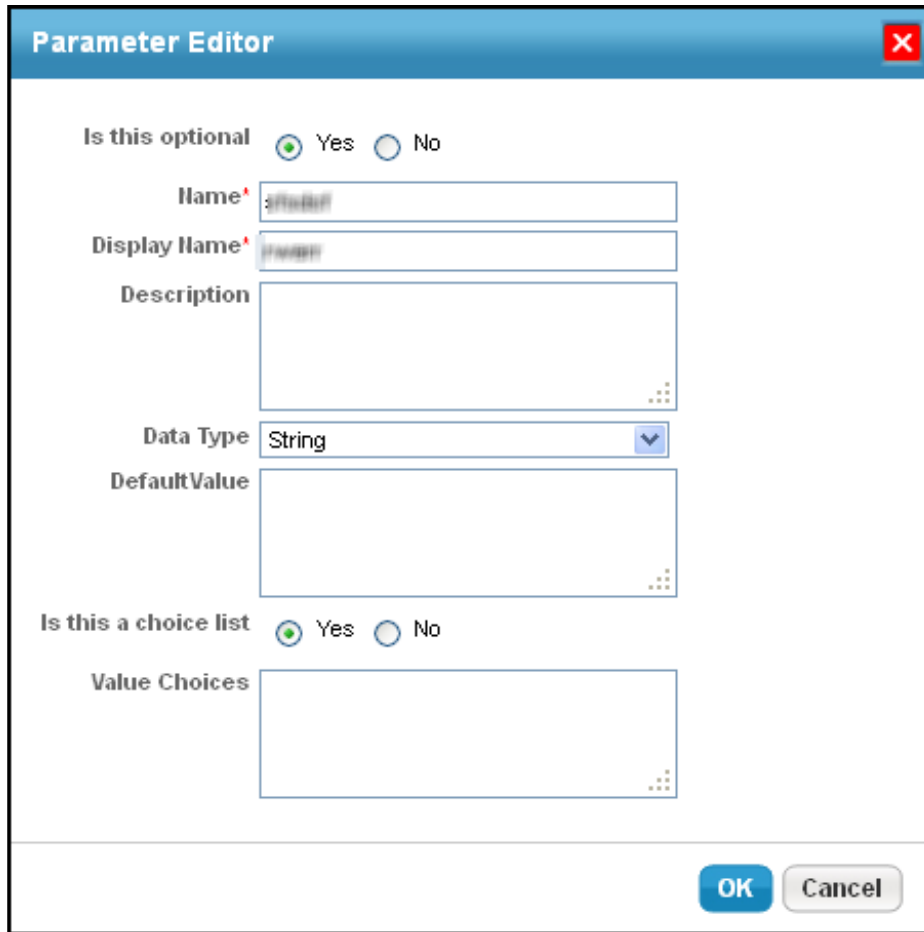

The screenshot shows a dialog box titled "Parameter Editor" with a red close button in the top right corner. The dialog contains the following fields and controls:

- Is this optional:** Radio buttons for "Yes" (selected) and "No".
- Name:** Text input field containing "Argument".
- Display Name:** Text input field containing "Param".
- Description:** Text area with a small grid icon in the bottom right corner.
- Data Type:** Dropdown menu showing "String".
- DefaultValue:** Text area with a small grid icon in the bottom right corner.
- Is this a choice list:** Radio buttons for "Yes" (selected) and "No".
- Value Choices:** Text area with a small grid icon in the bottom right corner.
- Buttons:** "OK" and "Cancel" buttons at the bottom right.

The Parameter Editor dialog.

3. Select the **Yes** or **No** radio buttons next to **Is this optional** to indicate whether you want the argument to be optional.
4. Complete the **Name**, **Display Name**, and **Description** fields.
5. Click **Data Type** to select a data type.
6. Add a **Default Value** for the selected string.
7. Select the **Yes** or **No** radio button next to **Is this a choice list**
8. Specify the value for choices if the argument is part of choice list.

9. Click **OK**.