



## Example Sun Directory Server Configuration

Your configuration will depend upon your organization's directory structure and policies. This example illustrates using the Authentication Connector to connect RiskVision with the Sun Directory Server.

If we assume that the organizational unit (ou) 'People' contains a user identifier (uid) for 'abarnes', the Sun Directory Server's LDAP data will look something like this:

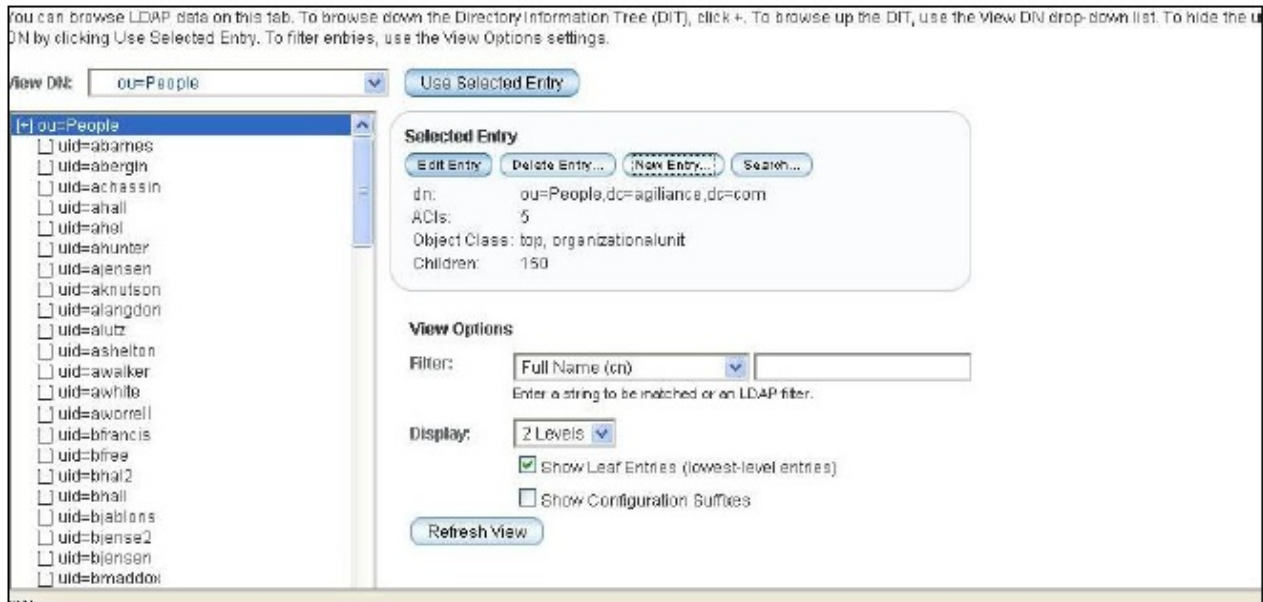


We configure the RiskVision Authentication connector to use 'uid' (as found on Sun Directory Server) as the Uid key. The base distinguished name (DN) establishes the root of the LDAP tree. In this case, it is `dc=,dc=com`.

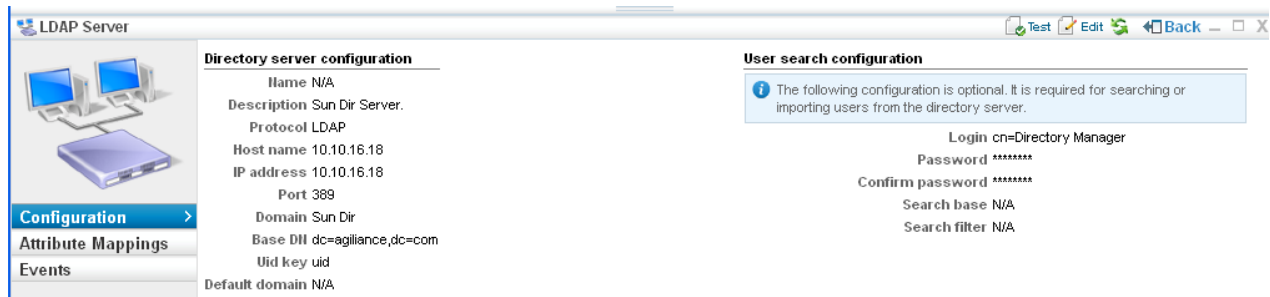

We test the connection by logging in as `uid=abarnes,ou=People,dc=,dc=com`, specifying user abarnes' password.

**User search configuration**

 The following configuration is optional. It is required for searching or importing users from the directory server.

<b>Login</b>	<input type="text" value="=abarnes,ou=People,dc=agliance,dc=com"/>
<b>Password</b>	<input type="password" value="....."/>
<b>Confirm password</b>	<input type="password"/>
<b>Search base</b>	<input type="text"/>
<b>Search filter</b>	<input type="text"/>