


Starting, Stopping, & Restarting the Exploit Database Connector

Installing the Exploit Database connector sets it up as a Microsoft Windows service; however, by default, the Microsoft Windows service will not be started. In order to start, stop, or restart the service, certain steps must be taken.

To start, stop, or restart the Exploit Database connector:

1. Go to **Start > Control Panel > System and Security > Administrative Tools**.
2. Click **Services**.
3. Right-click **RiskVision Exploit DB Connector**, and select either **Start**, **Stop**, or **Restart**.

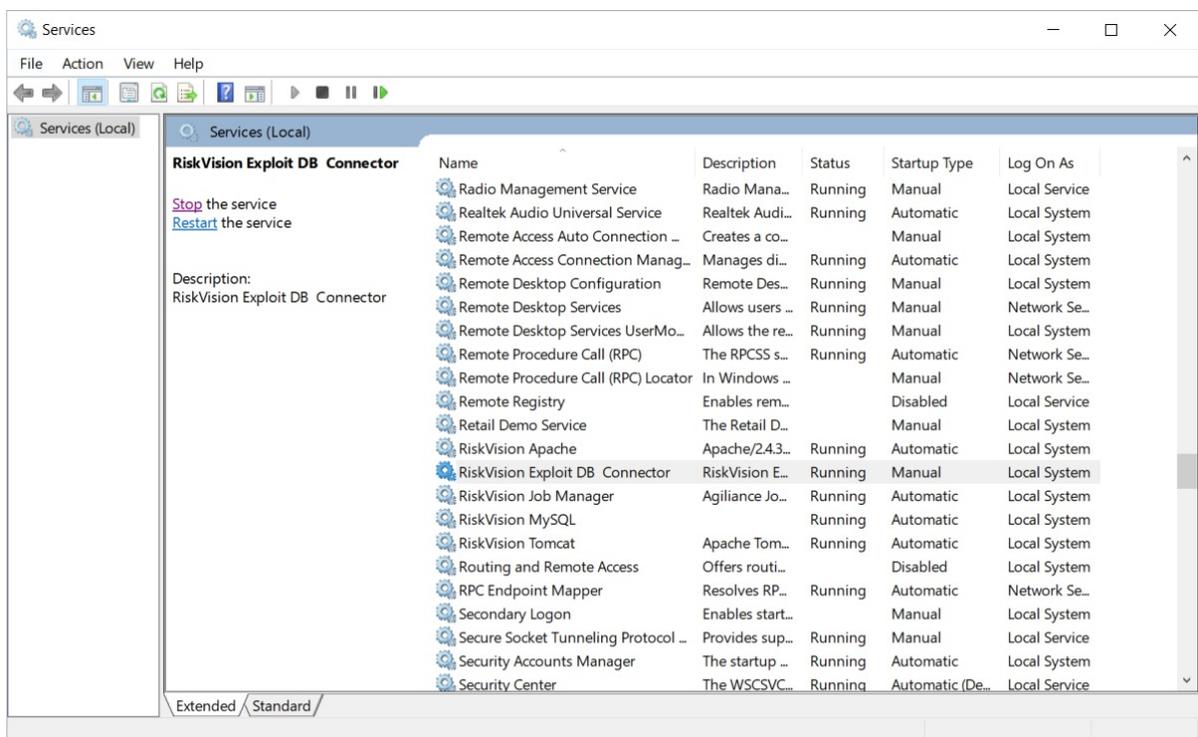

The RiskVision Exploit DB Connector in Services.